

Reolink Duo 2 PoE

4K 180° Dual Lens Camera

- Dual Lens
- 180° Panorama
- Person/Vehicle Detection

Specifications

Video & Audio	
Image Sensor	1/2.7" CMOS sensor
Resolution	4608×1728(8 Megapixels)@20FPS
Lens	f=3.2mm fixed, F=2.0
Video Compression	H.265/H.264
Zoom	N/A
Field of View	Horizontal: 180° Vertical: 60°
Infrared Night Vision	30 Meters (6pcs/20mil/850nm) (Auto-switching with IR-cut filter)
Color Night Vision	With Spotlight: 8pcs/5W/6500K/560Lumens
Frame Rate	Main stream: 2fps - 20fps (default: 20fps) Sub stream: 4fps - 15fps (default: 10fps)
Code Rate	Main stream: 3072Kbps -10240Kbps (default: 8192Kbps) Sub stream: 256Kbps - 2048Kbps (default: 1024Kbps)
Audio	Two-way audio
Power	


PoE	IEEE 802.3af, 48V Active
DC Power	DC 12.0V $\frac{23}{63}$ 2A, <15W
Interface	
Power Port	DC power port
Ethernet Port	One 10M/100Mbps; RJ45
SD Card Slot	Support Max. 256GB microSD Card
Reset Button	YES
Audio In/Out	Built-in microphone and speaker
Software Features	
Browser Supported	Edge, Chrome, Firefox, Safari
OS Supported	PC: Windows, Mac OS; Smartphone: iOS, Android
Protocols & Standards	HTTPS, SSL, TCP/IP, UDP, HTTP, IPv4, UPnP, RTSP, RTMP, SMTP, NTP, DHCP, DNS, DDNS, FTP, P2P
Software	
User Access	Max. 20 Users (1 admin & 19 user); Max. 12 simultaneous streams (2 main & 10 sub streams)
Other Features	
Smart Alarm	Motion detection/Person detection/Vehicle detection/Animal detection
Recording Modes	Motion-triggered recording (Default); Scheduled recording, 24/7 recording
Motion Track	YES
Time Lapse	YES
Smart Home Compatibility	Google Assistant
Working Environment	
Operating Temperature	-10°C~+55°C (14°F~131°F)
Operating Humidity	10% ~ 90%
Weatherproof	IP67

Size & Weight	
Dimensions	195 x 103 x 56mm
Weight (Without Accessories)	680g
Warranty	
Limited Warranty	2-year limited warranty. For support, visit https://support.reolink.com/hc/en-us/

Gallery & Specs



1. Lens
2. Daylight Sensor
3. Spotlight
4. IR LED
5. Mic
6. Mounting Bracket

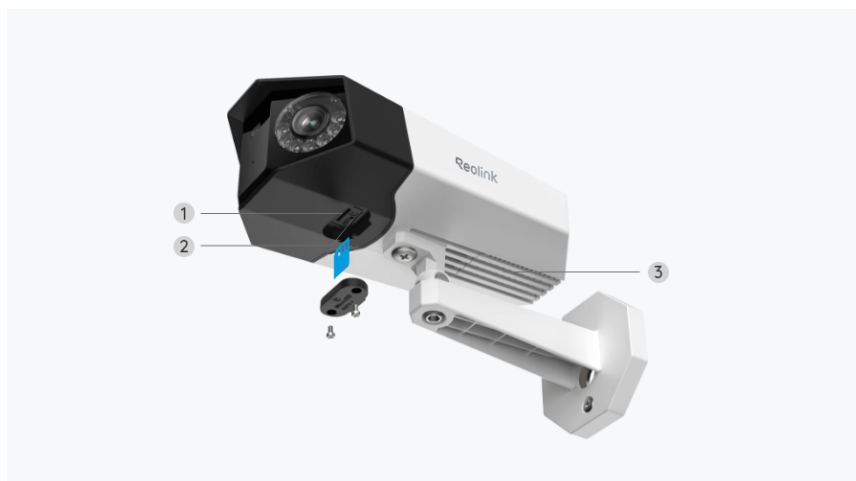

1. microSD Card Slot
2. Reset Button
3. Speaker



1. Power
2. Network
3. Waterproof Lid



1. You can mount the cam on the wall or on the ceiling.
2. You can loosen the screw to adjust the cam in any direction, and then tighten the screw to fix the cam.

