

2.5G Ethernet Switch

WI-PS505G | WI-PS508G | WI-SG505G | WI-SG508G



Overview

Wi-Tek 2.5G Ethernet Switches offer 4/8 ports with 2.5G Gigabit speeds. Based on the terminal type, all downstream ports are automatically compatible with 10M/100M/1G/2.5G. This series also includes a 2.5G PoE switch, which follows IEEE.802.3af/at/bt(Hi-PoE) protocol, supports access to various POE devices, and can be widely used in CCTV, and SMB scenarios. It provides a versatile solution for powering various terminals in mixed scenarios, effectively meeting their power supply requirements.

Features

High speed connection

Build and expand your network with Wi-Tek 2.5G PoE switch, delivering robust performance switching for growing networks.

Easy Installation

No configuration needed, simply connect network devices to the 2.5G Ethernet switch.

Fanless design

Fanless design lowers energy consumption and eliminates operating noise.

Specifications



Model	WI-PS505G	WI-PS508G	WI-SG505G	WI-SG508G
Hardware Features				
Interfaces				
Downlink Ports	4 10/100/1000/2500Mbps RJ45 PoE Ports 1 10/100/1000/2500Mbps Ethernet Port	8 10/100/1000/2500Mbps RJ45 PoE Ports	5 10/100/1000/2500Mbps RJ45 Ports	8 10/100/1000/2500Mbps RJ45 Ports
PoE				
PoE Port	Port 1–4	Port 1–8	N/A	
PoE Standard	Port 1: 802.3bt 60W Port 2–4:802.3af/at 30W	Port 1: 802.3bt 60W Port 2–8:802.3af/at 30W	N/A	
PoE Power	60W max for port 1,30W for port 2–4, 65W Max. (PoE power budget)	60W max for port 1,30W for port 2–8, 120W Max. (PoE power budget)	N/A	
Switch Property				
Standards and Protocols	IEEE 802.3 (Ethernet) IEEE 802.3u (Fast Ethernet) IEEE 802.3ab (Gigabit Ethernet) IEEE 802.3bz(2.5Gigabit Ethernet)		IEEE 802.3 (Ethernet) IEEE 802.3u (Fast Ethernet) IEEE 802.3ab (Gigabit Ethernet) IEEE 802.3bz(2.5Gigabit Ethernet)	
Forwarding Mode	Store and Forward			
Switching Capacity	25 Gbps	40 Gbps	25 Gbps	40 Gbps
Packet Forwarding Rate	18.6Mpps	29.76Mpps	18.6Mpps	29.76Mpps
MAC Address Table	4 k			
Packet Buffer Memory	8.1 MB			
Jumbo Frame	12 kB			
Power Supply				
Input Power	DC 52V 1.25A	DC 52V 2.5A	DC 12V 2A	
Power Consumption	Idle: 5 W 100% Traffic Rate with PoE: 70 W	Idle: 5 W 100% Traffic Rate with PoE: 125 W	N/A	




Model		WI-PS505G	WI-PS508G	WI-SG505G	WI-SG508G
Physical Characteristics					
LED Indicators	PWR	Solid on: The device power on is normal Off: The device is power off or failed		PWR Solid on: The device power on is normal Off: The device is power off or failed	
	2.5G/1G	Green : The negotiated rate is 1Gbps working Amber: The negotiated rate is 2.5Gbps Off: The negotiated rate is not 2.5G/1Gbps		2.5G/1G Green : The negotiated rate is 1Gbps working Amber: The negotiated rate is 2.5Gbps Off: The negotiated rate is not 2.5G/1Gbps	
	100/10M	On: The negotiated rate is 100/10Mbps Off: The negotiated rate is not 100/10Mbps		100/10M On: The negotiated rate is 100/10Mbps Off: The negotiated rate is not 100/10Mbps	
	PoE	On: PoE is working Off: PoE not working			
Fan Quantity	Fanless				
Switch Dimensions	160×113×31 mm	221×113×31 mm	160×113×31 mm	221×113×31 mm	
Package Dimensions	270*220*67mm	270*220*67mm	270*220*67mm	270*220*67mm	
Weight	Net Weight: 0.66 kg	Net Weight: 0.72kg	Net Weight: 0.52 kg	Net Weight: 0.68 kg	
	Package Weight: 1.10 kg	Package Weight: 1.46 kg	Package Weight: 0.85 kg	Package Weight: 1.04 kg	
Installation	Desktop				
Environmental					
Reliability	Surge Immunity	IEC 61000-4-5 Common mode 6kV Differential mode 2kV			
	ESD Protection	IEC 61000-4-2 Contact discharge 4kV Air discharge 8kV			
Operating Temperature	-10 ~ 55°C				
Storage Temperature	-40 ~ 75°C				
Operating Humidity	5% ~ 90% RH no condensation				
Storage Humidity	5% ~ 95% RH no condensation				
Certification					
Certification	CE, FCC, RoHS, UKCA, RCM				


Appearances and Dimensions

WI-PS505G

Dimensions (mm)

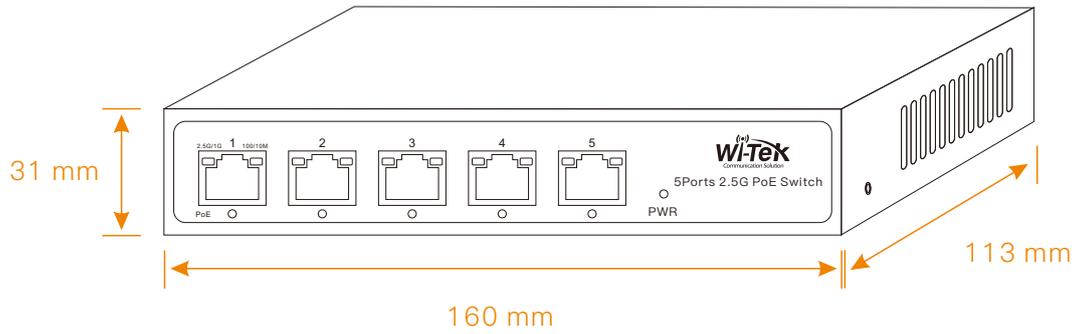


Front Panel	Side Panel
-------------	------------

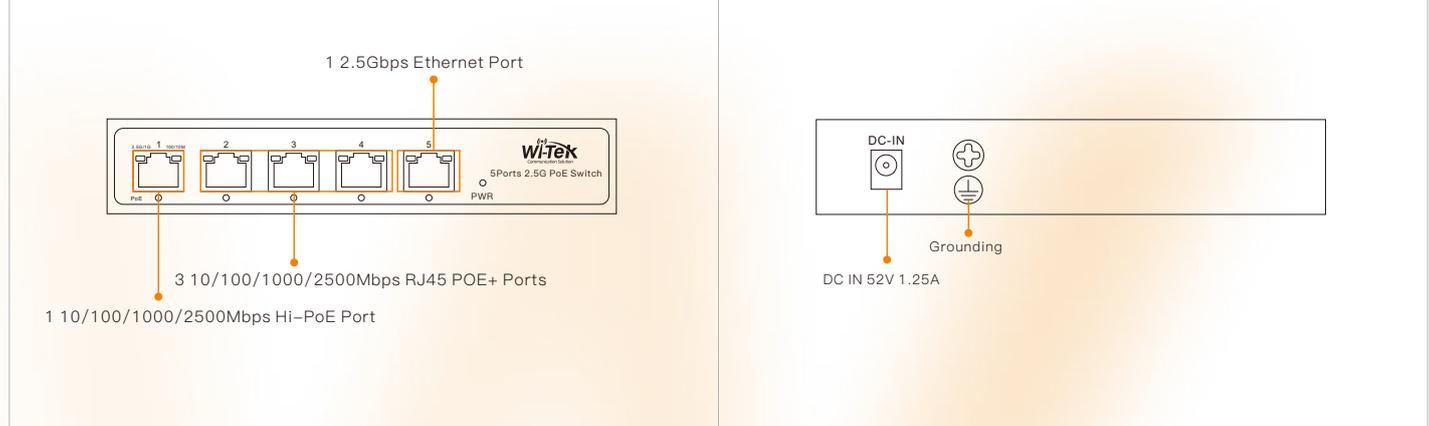


WI-PS508G

Dimensions (mm)

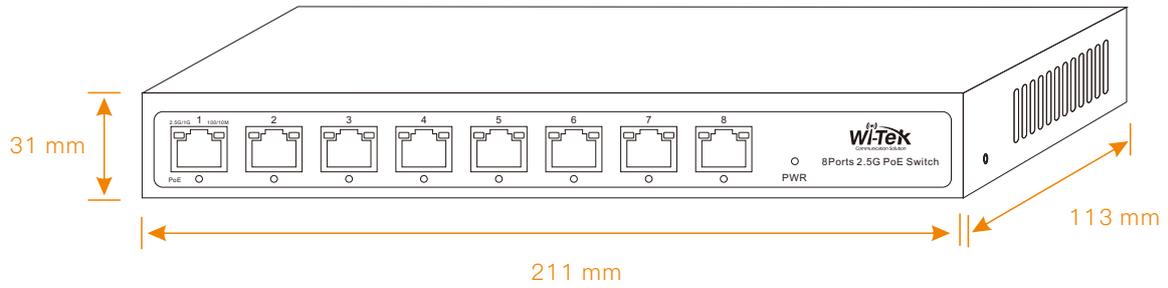

Front Panel

Rear Panel




7 10/100/1000/2500Mbps RJ45 PoE+ Ports
 1 10/100/1000/2500Mbps Hi-PoE Port


DC IN 52V 2.5A
 Grounding

WI-SG505G

Dimensions (mm)

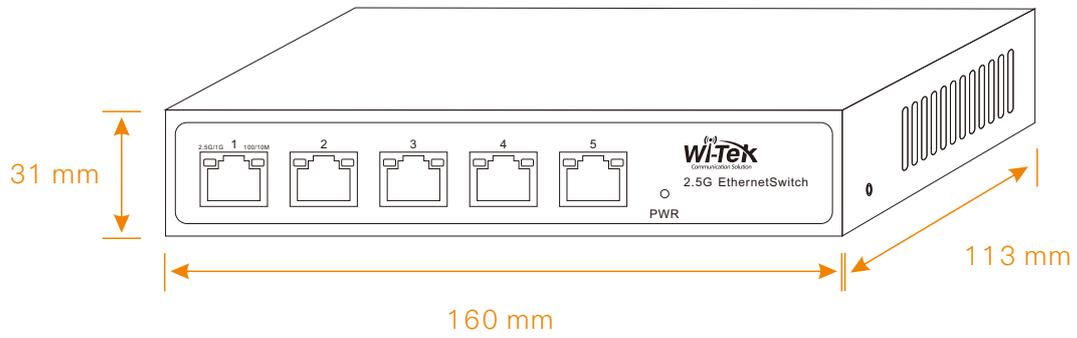

Front Panel



5 10/100/1000/2500Mbps Ethernet Ports


Rear Panel




DC IN 12V 2A

WI-SG508G

Dimensions (mm)

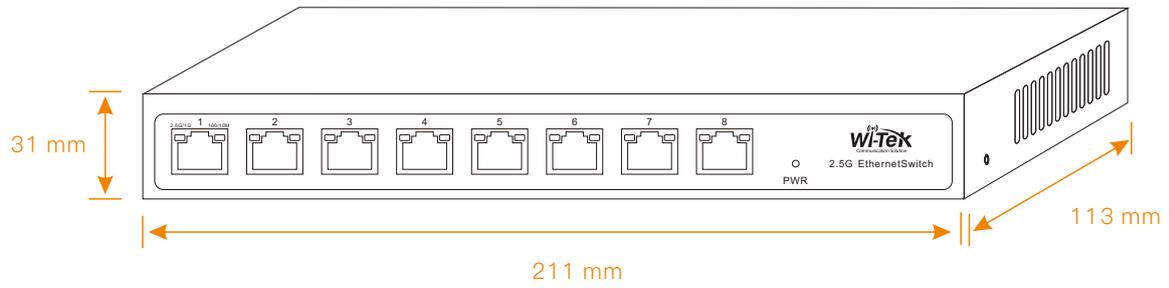

Front Panel



8 10/100/1000/2500Mbps Ethernet Ports

Rear Panel



DC IN 12V 2A

Package Contents

Welcome to order our products. After purchasing, you will receive:

Items	Quantity
Switch	1 pcs
AC Cord(Except WI-SG505G WI-SG508G)	1 pcs
Power Adapter	1 pcs
Quick Installation Guide	1 pcs



Wireless-Tek Technology Limited

Address: Biaofan Technology Building 402, Bao'an street,
Baoan District, Shenzhen City, Guangdong, China

Website: www.wireless-tek.com

Tel: 86-0755-32811290

Email: sales@wireless-tek.com

Technical Support: tech@wireless-tek.com



Technical Support



Cloud Management



Company Website