

Wi-Tek Cloud Easy smart PoE switch

WI-PCES306G|WI-PCES310GF|WI-PCES318GF|
WI-PCES326GF



Overview

Wi-Tek Cloud Easy smart PoE switch provides simple, safe, and easy-to-use local WEB and remote management methods, supports smart deployment, abnormal alarm, ONVIF automatic identification of network cameras, automatic shutdown of loop ports, etc. Even beginners can easily use it without professional IT operation and maintenance. Wi-Tek Cloud Easy Smart PoE Switch is the best choice for CCTV and SMB network solution.

Features

Support Wi-Tek cloud management

ONVIF cameras and Wi-Tek cloud management devices can be remotely managed through Wi-Tek cloud platform/mobile APP, making CCTV network projects truly intelligent and easy to maintain. You can easily access and manage your cameras from your phone or computer anytime, anywhere.

(The EWEB channel can be created only when the easy smart switch is linked with the other type of Wi-Tek cloud management device, such as cloud L2, L3 management switch, gateway, wireless AP, etc.)

Automatic loop prevention

By default, the switch enables port loop detection. When a loop occurs on the switch, the port which caused the loop will be closed in time to enable the switch to operate properly and maintain service continuity.

Remote Configuration

No need to go to the site to configure. Users can make some remote configurations such as port restart, PoE restart, VLAN division, and even maintenance and debugging can be done remotely anytime and anywhere.

Intelligent Operation and Maintenance

Abnormal alarm can help you locate problems quickly, making your operation and maintenance easier.

Specifications



Model	WI-PCES306G	WI-PCES310GF	WI-PCES318GF	WI-PCES326GF
Interfaces				
Downlink Ports	4*10/100/1000 BASE-T RJ45 ports	8*10/100/1000 BASE-T RJ45 ports	16*10/100/1000 BASE-T RJ45 ports	24*10/100/1000 BASE-T RJ45 ports
Uplink Ports	2*10/100/1000Mbps BASE-T RJ45 ports	2*1000Mbps SFP Slots	2*1000Mbps SFP Slots	2*1000Mbps SFP Slots
PoE				
PoE Port	Port 1-4: 802.3af/at PoE Ports	Port 1-8: 802.3af/at PoE Ports	Port 1-16: 802.3af/at PoE Ports	Port 1-24: 802.3af/at PoE Ports
PoE Standard	802.3af/at			
PoE Power Supply Type	End-span			
PoE Pin Assignment	1/2(+), 3/6(-)			
PoE Power	30W Max. for each port, 60W Max. for PoE power budget	30W Max. for each port, 120W Max. for PoE power budget	30W Max. for each port, 250W Max. for PoE power budget	30W Max. for each port, 370W Max. for PoE power budget
Performance				
Memory and Flash	Memory: 128K DDR3 Flash:16MB			
Switch Property				
Standards and Protocols	IEEE 802.3,	IEEE 802.3,	IEEE 802.3,	IEEE 802.3,
	IEEE 802.3u,	IEEE 802.3u,	IEEE 802.3u,	IEEE 802.3u,
	IEEE802.3ab,	IEEE 802.3ab,	IEEE 802.3ab,	IEEE 802.3ab,
	IEEE 802.3x,	IEEE 802.3z,	IEEE 802.3z,	IEEE 802.3z,
	IEEE 802.1x,	IEEE 802.3x,	IEEE 802.3x,	IEEE 802.3x,
	IEEE 802.1q,	IEEE 802.1x,	IEEE 802.1x,	IEEE 802.1x,
	IEEE 802.1p,	IEEE 802.1q,	IEEE 802.1q,	IEEE 802.1q,,
	IEEE 802.1d,	IEEE 802.1p,	IEEE 802.1p, ,	IEEE 802.1d,
	IEEE 802.1w,	IEEE 802.1d,	IEEE 802.1d,	IEEE 802.1w,
	IEEE 802.3ad,	IEEE 802.1w,l	IEEE 802.1w,	IEEE 802.3ad,
	IEEE 802.3af,	EEE 802.3ad,	IEEE 802.3ad,	IEEE 802.1p,
	IEEE 802.3at	IEEE 802.3af,	IEEE 802.3af,	IEEE 802.3af,
		IEEE 802.3at	IEEE 802.3at	IEEE 802.3at

Forwarding Mode	Store and Forward			
Switching Capacity	12 Gbps	20 Gbps	36 Gbps	52 Gbps
Packet Forwarding Rate	8.93 Mpps	14.88 Mpps	26.78 Mpps	38.68 Mpps
MAC Address Table	8k			
Packet Buffer Memory	4.1Mbit			
Jumbo Frame	9 kB			

Power Supply

Input Power	AC 100–240V, 50/60Hz			
Power Consumption	Idle: 3.9W 100% Traffic Rate with PoE: 65 W	Idle: 3.4W 100% Traffic Rate with PoE: 130 W	Idle: 9.1W 100% Traffic Rate with PoE: 250 W	Idle: 11.7W 100% Traffic Rate with PoE: 370 W

Physical Characteristics


LED Indicators	<p>PWR Indicator:</p> <p>On: the device power on is normal</p> <p>Off: the device is power off or failed</p> <p>Link Indicator:</p> <p>Off: No device is connected to the corresponding port.</p> <p>On: Indicates the link through that port is successfully established</p> <p>Blinking: Indicates that the Switch is actively sending or receiving data over that port.</p> <p>PoE Indicator:</p> <p>Off: No PoE powered device (PD) connected.</p> <p>On: There is a PoE PD connected to be port, which supply power successfully.</p> <p>Blinking: Indicates the port is abnormal.</p>	<p>PWR Indicator:</p> <p>On: the device power on is normal</p> <p>Off: the device is power off or failed</p> <p>Link Indicator:</p> <p>Off: No device is connected to the corresponding port.</p> <p>On: Indicates the link through that port is successfully established</p> <p>Blinking: Indicates that the Switch is actively sending or receiving data over that port.</p> <p>PoE Indicator:</p> <p>Off: No PoE powered device (PD) connected.</p> <p>On: There is a PoE PD connected to be port, which supply power successfully.</p> <p>Blinking: Indicates the port is abnormal.</p> <p>SFP Indicator:</p> <p>On: port connected</p> <p>Off: Port disconnected.</p> <p>Blinking:Data transmission</p>
----------------	---	--

Buttons	Hold for >5 sec. to restore factory default.			
Dimensions (W*D*H)	170*99*34mm	222*156*46mm	443*214*47mm	443*214*47mm
Weight	Net Weight: 0.52kg	Net Weight: 1.24kg	Net Weight: 2.4kg	Net Weight: 2.78kg
	Package Weight: 0.83 kg	Package Weight: 1.84kg	Package Weight: 3.09kg	Package Weight: 3.46kg
Installation	Desktop	Rack–Mounted	Rack–Mounted	Rack–Mounted
Environmental				
Reliability	Surge Immunity	Common mode ±4kV Differential mode ±2kV		
	ESD Protection	Contact discharge ±6kV Air discharge ±8kV		
Operating Temperature	–10℃ ~ 45℃(14°F ~ 113°F)			
Storage Temperature	–20℃ ~ 70 °C(–4°F~158°F)			
Operating Humidity	10% ~ 90% RH no condensation			
Storage Humidity	5% – 90% RH non–condensing			
Certification				
Certification	CE, FCC, RoHS, UKCA, RCM			
Software Features				
System Management	Static IP			
	DHCP Client			
	Static DNS			
	DNS Client			
	Web–based Management			
	Web Page Software Upgrade			
	Cable testing			
Security	IP MAC address binding			
	MAC Address Filter			


	Loop Prevention
	Loop Disabled Port
	DHCP Snooping
VLAN Settings	Port-based VLAN
	VLAN 16
Port	Port Flow Control
	Broadcast Storm Suppression
	Port Isolation
	Many-to-one Port Mirroring
	QoS
Onvif	Support cloud platform to automatically identify IP cameras
Cloud Management	Support Wi-Tek cloud platform management

WI-PCES306G


Dimensions (mm)

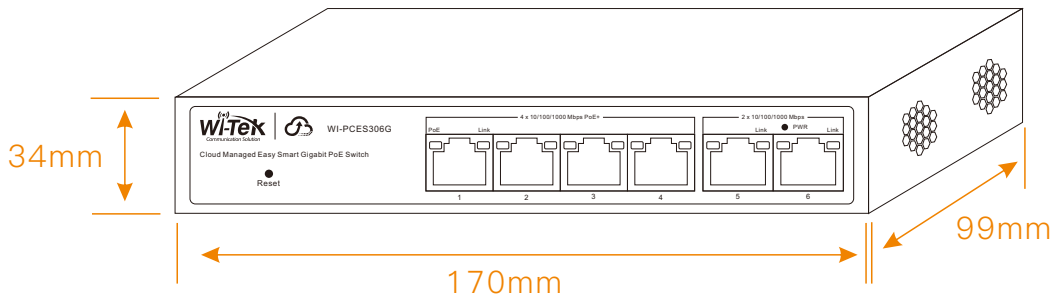

Front Panel

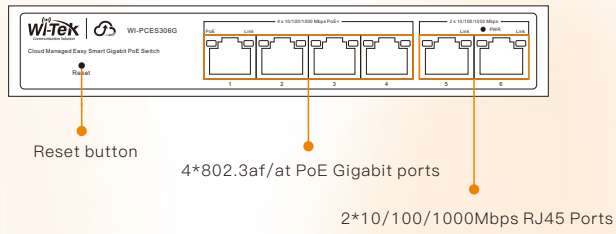


Side Panel

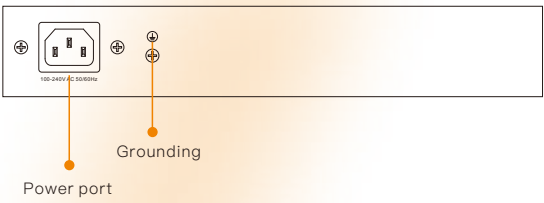



WI-PCES310GF

Dimensions (mm)

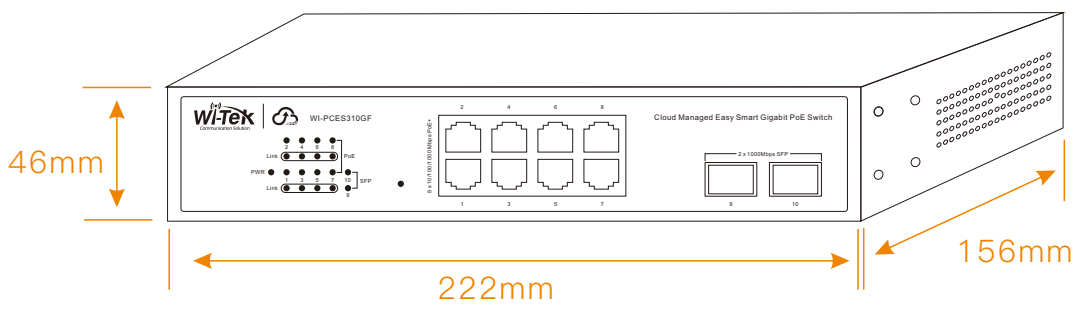


Front Panel

Side Panel

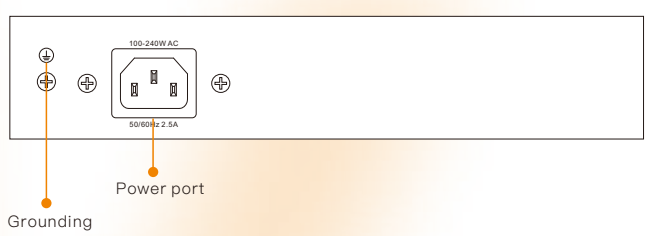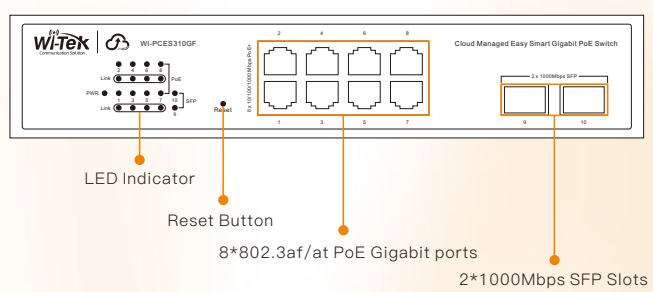


WI-PCES318GF


Dimensions (mm)

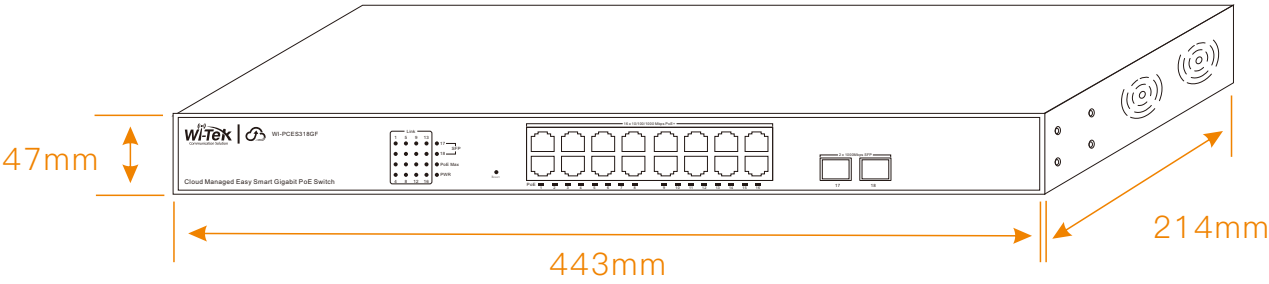

Front Panel

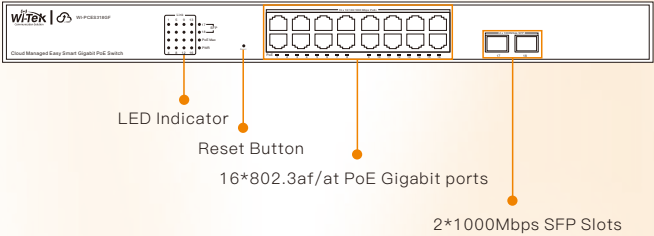


Side Panel

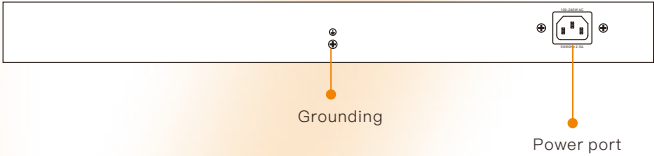


WI-PCES326GF


Dimensions (mm)

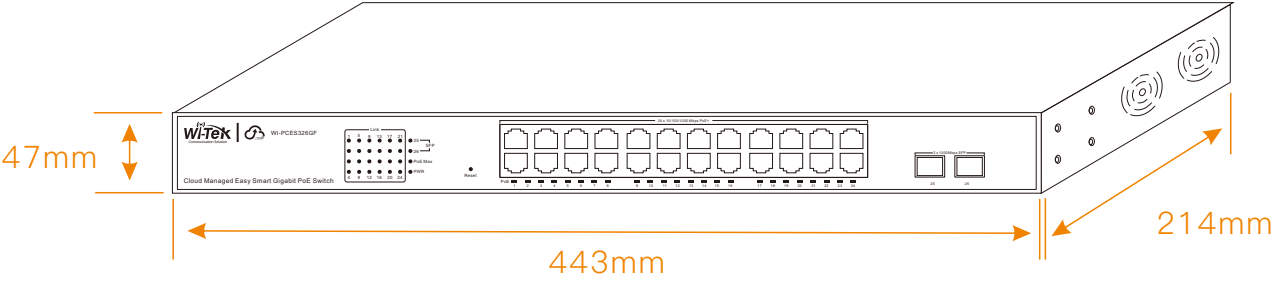

Front Panel

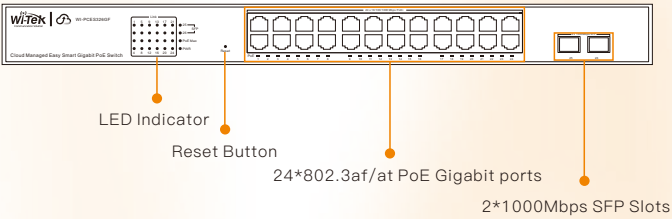

Side Panel

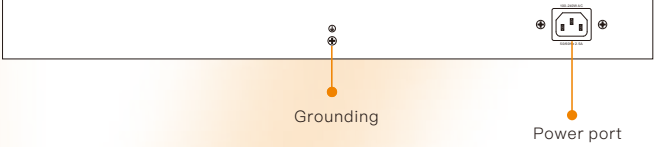

Package Contents

Welcome to order our products. After purchasing, you will receive:

WI-PCES306G

Items	Quantity
Switch	1 pcs
Quick Installation Guide	1 pcs
Power Cord	1 pcs
Mounting Accessories	MATS x 4

WI-PCES310GF/WI-PCES318GF/WI-PCES326GF

Items	Quantity
Switch	1 pcs
Quick Installation Guide	1 pcs
Power Cord	1 pcs
Mounting Accessories	Hook x 2, MATS x 4, Screw x 8



Wireless–Tek Technology Limited
 Address: Biaofan Technology Building 402, Bao'an street,
 Baoan District,Shenzhen City, Guangdong, China
 Website:www.wireless–tek.com
 Tel:86–0755–32811290
 Email:sales@wireless–tek.com
 Technical Support:tech@wireless–tek.com



Technical Support



Cloud Management



Company Website