






H-2772 2-WAY SPLITTER

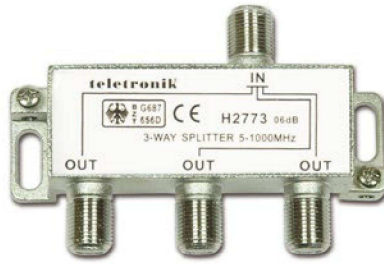


H-2773 3-WAY SPLITTER

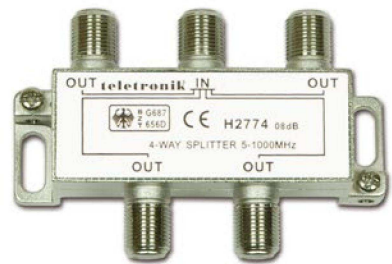

H-2774 4-WAY SPLITTER

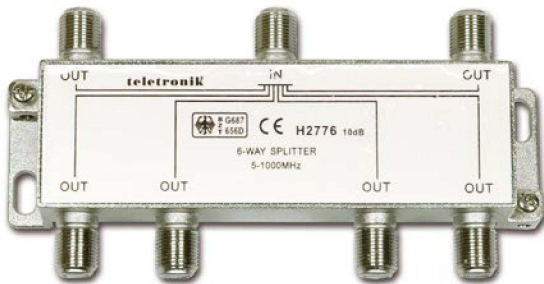

H-2776 6-WAY SPLITTER

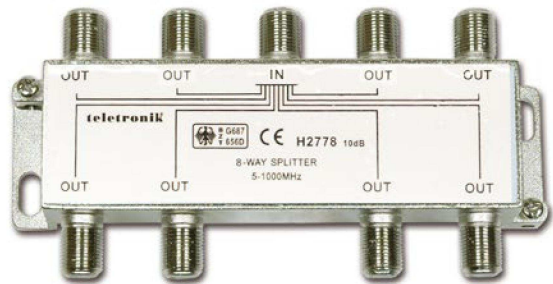

H-2778 8-WAY SPLITTER

Parameter	Frequency Range (MHz)	H-2772	H-2773	H-2773U		H-2774	H-2776	H-2778
Insertion Loss (dB)	5-10 MHz	≤3.5	≤5.7	≤3.5	≤6.8	≤6.8	≤8.9	≤10.6
	11-65 MHz	≤3.6	≤5.6	≤3.6	≤7.0	≤7.0	≤8.8	≤11.0
	66-750 MHz	≤3.8	≤6.1	≤3.8	≤7.5	≤7.5	≤9.9	≤11.5
	750-1000 MHz	≤4.0	≤6.3	≤4.0	≤7.8	≤7.8	≤10.2	≤12.0
Mutual Isolation (dB)	5-10 MHz	≥25	≥25	≥25		≥25	≥25	≥25
	11-65 MHz	≥28	≥26	≥28		28	≥28	≥28
	66-750 MHz	≥28	≥26	≥28		≥28	≥28	≥28
	750-1000 MHz	≥25	≥25	≥25		≥25	≥25	≥25
Return Loss (dB)	5-10 MHz	≥18	≥18	≥18		≥18	≥18	≥18
	11-65 MHz	≥20	≥20	≥20		≥18	≥20	≥20
	66-750 MHz	≥20	≥20	≥20		≥20	≥20	≥20
	750-1000 MHz	≥18	≥18	≥18		≥18	≥18	≥18