


# DIGITUS Modular Plug for Round Cable, CAT 6A, shielded, Pass through connector

AK-219604  
EAN 4016032380627

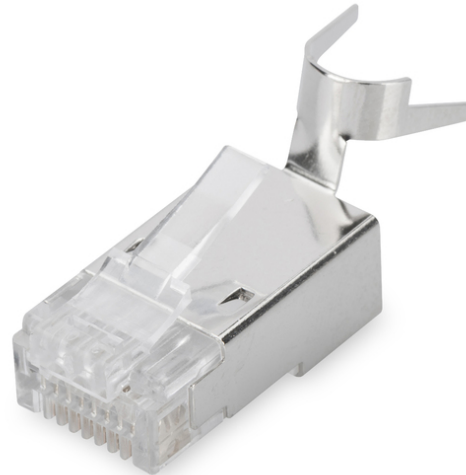

### CAT 6A Modular Plug, 8P8C, shielded for solid wire AWG 22-23, pass through

These modular plugs can be used to establish quick and simple connections.

- Crimping tool – DN-94025 (Multi Modular Crimping Tool Pass through connectors)
- Layout performance: CAT 6A, 10GBase-T
- Area of application: Patch cable assembly
- Norms: ISO/IEC 11801 3rd Ed., EN 50173-1, EIA/TIA 568-C
- General properties:

- UL certified
- Technical properties:
- Mating cycles female: > 750 acc. to ISO/IEC 11801, IEC 60603-7-5
- Material connector body: Polycarbonat, clear
- Connector contact: Phosphor bronze, brass 0.6 µ gold-plated
- Flammability: UL 94V-2
- Physical properties:
- Insertion force: ≤ 30 N
- Diameter Cu-Conductor: AWG (23/1... 22/1)
- Operating temperature: -40 °C to +80 °C
- Current carrying capacity: 1A -1.5A at 50 °C

| Logistics                    |              |             |            |            |             |                 |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm <sup>3</sup> |
| Packaging Unit Carton        | 3600         | 14.34       | 37.00      | 51.00      | 33.00       | 62,271.00       |
| Packaging Unit Inside        | 100          | 0.40        | 23.00      | 33.00      | 2.00        | 1,518.00        |
| Packaging Unit Single        | 1            | 0.00        | 1.00       | 2.00       | 0.50        | 1.00            |
| Net single without Packaging | 1            | 0.00        | 1.00       | 2.00       | 0.50        | 1.00            |